



WALL MOUNTED GAS CONDENSING BOILER

Very attractively priced wall mounted boiler  
for apartments and single-family houses:

**VITODENS 100-W** (type B1HF/B1KF)

**VITODENS 111-W** (type B1LF)



**Heating with gas**

Impressively  
economical and  
environmentally  
friendly operation

Compact and efficient wall mounted gas condensing boilers with a very attractive price/performance ratio



**H<sub>2</sub> READY**  
20% hydrogen operation


Vitodens 100-W featuring an attractive design in Vitoppearwhite

As a large-scale manufacturer with many years of experience in the production of wall mounted boilers, we know what matters. Viessmann product quality is something you can rely on, and the very attractively priced Vitodens 100-W and Vitodens 111-W (with integral 46 litre stainless steel loading cylinder) are no exception. Viessmann wall mounted boilers are renowned not just for their innovative technology and performance, but for their reliability and durability too. Thanks to advanced assemblies, this wall mounted gas condensing boiler is extremely compact and can be installed even in small recesses. No side service clearances are required, since all the connections are easily accessible from the front. This makes Vitodens wall mounted boilers ideal for modernising apartments or single-family houses.

**MatriX-Plus burner:  
the heart of your heating system**

Among the benefits of the MatriX-Plus burner are its efficient operation, quiet running and low emissions. The special stainless steel MatriX surface is resistant to high temperatures, which ensures reliable performance and a long service life.

Another technical innovation from Viessmann is the fully automatic Lambda Pro combustion controller. It automatically adapts to all gas types and ensures consistently clean and efficient combustion.



MatriX-Plus burner

**Stainless steel Inox-Radial heat exchanger:  
efficient and durable**

Stainless steel makes all the difference. The corrosion-resistant, stainless steel Inox-Radial heat exchanger is at the heart of the Vitodens 100-W/111-W. It efficiently converts the input energy into heat. In addition, the particularly durable, high grade stainless steel ensures reliability.

**10 year guarantee**


on stainless steel heat exchangers for gas condensing boilers up to 150 kW

For conditions, see [www.viessmann.de/garantie](http://www.viessmann.de/garantie)



Inox-Radial heat exchanger

**VITODENS 100-W**  
**VITODENS 111-W**  
 3.2 to 32 kW



LCD screen with 7-segment display and touch buttons

**Energy savings, convenience and reassurance with ViCare**


Vitodens wall mounted gas condensing boilers with the new electronic platform have an integral WiFi interface. This connects the heating system directly to the internet if required. Operating the heating system is very simple and intuitive with the ViCare app. It sets the course for digital services and is in direct contact with the local heating contractor. The ViCare app provides information on the current operating status of the energy system, while time programs for central heating and DHW heating contribute to energy cost savings. It is compatible with almost all iOS and Android mobile devices.

ViCare can use the smartphone's GPS function\* to detect how far the user is from the heating system. If specified distances are exceeded, the room temperature is automatically reduced. You can also expand the system with a ViCare thermostat to enjoy even more convenience and efficiency.

\* Optional for a fee; not available in all countries

**Simple operation with 7-segment display**

The LED screen with 7-segment display in the new electronic platform features a discreet "black panel" design and is noted for its simple, easy to understand operation. It can be used for convenient control of heating systems with a direct heating circuit and/or a heating circuit with mixer.



The ViCare app allows convenient operation of the heating system, helping to save energy – anytime, anywhere.



Connectivity  
Inside

**5 year guarantee**

subject to connectivity and proof of annual inspection and maintenance


For conditions, see [www.viessmann.de/garantie](http://www.viessmann.de/garantie)



ViCare thermostat for more convenience and efficiency

**BENEFITS OF THE VITODENS 100-W AND VITODENS 111-W**

- + Very attractive price/performance ratio
- + Durable and efficient thanks to Inox-Radial stainless steel heat exchanger
- + MatriX-Plus burner with Lambda Pro combustion controller for permanently high efficiency and clean combustion
- + Simple and intuitive operation via LED screen with 7-segment display and touch buttons
- + Web-enabled thanks to integrated WiFi interface for more comfort, energy savings and reassurance with ViCare
- + Certified for 20 % hydrogen content in natural gas

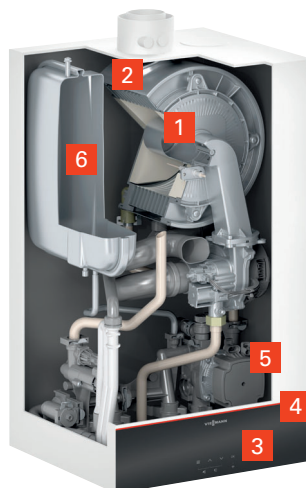

**VITODENS 100-W**

(Type B1HF)

- 1 MatriX-Plus burner with Lambda Pro combustion controller
- 2 Inox-Radial heat exchanger
- 3 LED screen with 7-segment display and touch buttons
- 4 Internet inside
- 5 High efficiency pump
- 6 Expansion vessel (8 litres)

## Wall mounted gas condensing boiler

### VITODENS 100-W

Appliance type	Gas condensing system boiler (type B1HF) and combi boiler (type B1KF)				
		System boiler	System/combi boiler	System/combi boiler	System/combi boiler
<b>Rated heating output range</b>					
50/30 °C	kW	3.2 – 11.0	3.2 – 19.0	3.2 – 25.0	3.2 – 32.0
80/60 °C	kW	2.9 – 10.1	2.9 – 17.5	2.9 – 23.0	2.9 – 29.3
<b>Dimensions</b>					
Length	mm	360	360	360	360
Width	mm	400	400	400	400
Height	mm	700	700	700	700
<b>Weight</b>	kg	33	33	33	33
<b>Flue gas connection</b>	Ø mm	60	60	60	60
<b>Ventilation air connection</b>	Ø mm	100	100	100	100
<b>Combi boiler DHW output</b>	kW	–	27.3	31.7	34.9
<b>Energy efficiency class</b>		<A>	<A>	<A>	<A>

The Vitodens 100-W combi boiler is equipped with an integral instantaneous water heater for DHW heating.



Vitodens 100-W  
(B1HF and B1KF)

### VITODENS 111-W

<b>Rated heating output range</b>				
50/30 °C	kW	3.2 – 19.0	3.2 – 25.0	3.2 – 32.0
80/60 °C	kW	2.9 – 17.5	2.9 – 23.0	2.9 – 29.3
<b>Dimensions</b>				
Length	mm	500	500	500
Width	mm	600	600	600
Height	mm	950	950	950
<b>Weight</b>	kg	68	68	68
<b>Cylinder capacity</b>	l	46	46	46
<b>Draw-off rate</b>	l/min	18.5	20.1	21.2
<b>Continuous DHW output</b>	kW	26.6	30.3	33.9
<b>Flue gas connection</b>	Ø mm	60	60	60
<b>Ventilation air connection</b>	Ø mm	100	100	100
<b>Energy efficiency class</b>		<A>	<A>	<A>
		<A>	<A>	<A>

**Note on draw-off rate:** Specified for  $\Delta T$  30 K

Vitodens 100-W/111-W appliances are tested and approved for natural gas and LPG to EN 15502.  
Different rated heating output for operation with LPG or multiple flue connection; see technical guide



Vitodens 111-W (B1LF)

## PRODUCT FEATURES

- + Rated heating output: 3.2 to 32 kW
- + Standard seasonal efficiency [to DIN]: up to 98 % (H<sub>g</sub>) [gross cv]
- + Modulation range down to 1:10
- + Power saving, high efficiency circulation pump
- + Energy efficiency class: A

### Special benefit of the Vitodens 100-W combi boiler (type B1KF):

- + High level of DHW convenience as a result of the standby function

### Special benefit of the Vitodens 111-W (type B1LF):

- + High level of DHW convenience thanks to an integral stainless steel loading cylinder

Your trade partner