

Waste disposal cooler
CONFI-COOL

VIESSMANN
climate of innovation

Waste disposal at a high level



Heating systems
Industrial energy systems
Refrigeration systems ◀

Confi-Cool



Durability and reliability for guaranteed waste hygiene

Storing waste hygienically is particularly important when dealing with foodstuffs and is regulated by laws. They stipulate that many organic and inorganic waste substances must be stored at temperatures of below 5°C.

To meet the strict requirements of commercial kitchens, butchers, food producers and restaurants, Viessmann has created the Confi-Cool waste disposal cooler: the perfect solution for economic and reliable cooling of your waste matter.

As is the case with all Viessmann products the waste disposal cooler has been built paying special attention to optimum manufacturing quality, the best materials and the use of proven branded components. This is demonstrated by the fact that austenitic stainless steel 1.4301 (V2A) is used both for the interior housing and for the outer cladding to ensure excellent corrosion resistance and ease of cleaning. Durability and reliability are thus guaranteed. The optional winter switch for trouble free use in open-air applications completes the Confi-Cool package.

The doors and hatches with locks, continuous grip profiles and replaceable magnetic sealing frames make optimum maintenance of the Confi-Cool possible. In addition, the removable hinges and the throw-in hatches, which can be easily removed without tools, improve the ease of cleaning. Internal guide and buffer strips enable the container to be positioned accurately under the waste deposit opening.

The seamless and gapless transition between the waste deposit opening and the storage compartment has been created without any overlap, enabling hygienic waste refrigeration and trouble-free cleaning of the waste deposit area. The storage compartment has no undercut, but a continuous incline towards the doors and the sides of the rounded floor pan are curved upwards. To enable easy cleaning, the storage compartment is kept free from electrical components.



At a glance

- With self assembly, uneven floors can be compensated from the inside using height-adjustable feet
- Energy-saving alternative to larger cold rooms
- Ramp for changing the waste bins
- Completely in stainless steel 1.4301
- Refrigerating unit ready for operation
- Thermostatically-controlled external cooler with digital thermostat with defrost control and temperature display




Technical specifications - Waste disposal cooler - 1 rubbish bin



Model	CONFI-COOL 1 x 120 l	CONFI-COOL 1 x 240 l
Version	Completely in stainless steel 1.4301 (exterior with brush finish)	Completely in stainless steel 1.4301 (exterior with brush finish)
Dimensions mm (W / W with unit x H x D)	620/940 x 1162 x 692	720/1040 x 1300 x 870
Wall thickness (mm)	56	56
Ambient temperature	+14°C ... +32°C	+14°C ... +32°C
Interior temperature	+4°C ... +20°C	+4°C ... +20°C
Power supply (V)	230	230


Waste disposal cooler 2 x 120 l

°C **+4..+20**

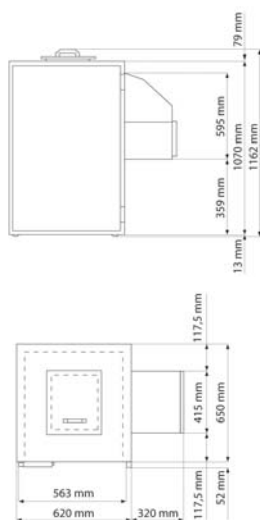

Waste disposal cooler 2 x 240 l

°C **+4..+20**

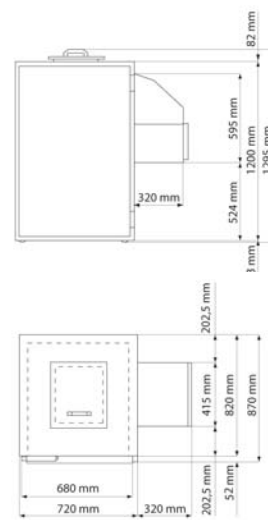





Model	CONFICOOL 2 x 120 I	CONFICOOL 2 x 240 I
Version	Completely in stainless steel 1.4301 (exterior with brush finish)	Completely in stainless steel 1.4301 (exterior with brush finish)
Dimensions mm (W / W with unit x H x D)	1190/1510 x 1162 x 692	1420/1740 x 1300 x 870
Wall thickness (mm)	56	56
Ambient temperature	+14°C ... +32°C	+14°C ... +32°C
Interior temperature	+4°C ... +20°C	+4°C ... +20°C
Power supply (V)	230	230

Waste disposal cooler 2 x 120 l

°C



+4.+20

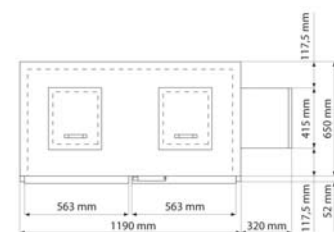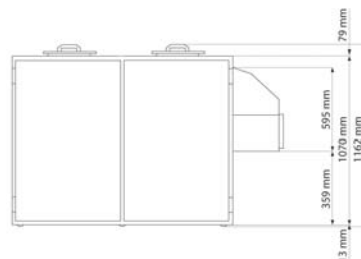

Waste disposal cooler 2 x 240 l

°C

+4.+20

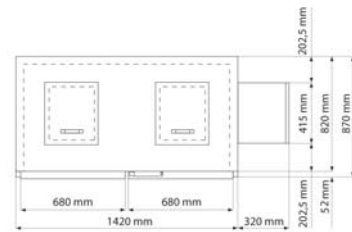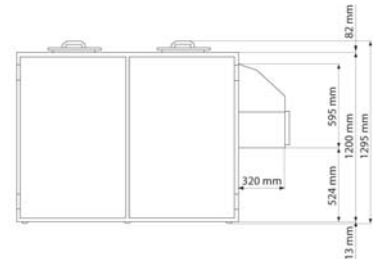


Technical specifications - Waste disposal cooler - 3 rubbish binn



Model	CONFI-COOL 3 x 120 l	CONFI-COOL 3 x 240 l
Version	Completely in stainless steel 1.4301 (exterior with brush finish)	Completely in stainless steel 1.4301 (exterior with brush finish)
Dimensions mm (W / W with unit x H x D)	1720/2040 x 1162 x 692	2020/2340 x 1300 x 870
Wall thickness (mm)	56	56
Ambient temperature	+14°C ... +32°C	+14°C ... +32°C
Interior temperature	+4°C ... +20°C	+4°C ... +20°C
Power supply (V)	230	230


Waste disposal cooler 3 x 120 l

°C **+4.+20**

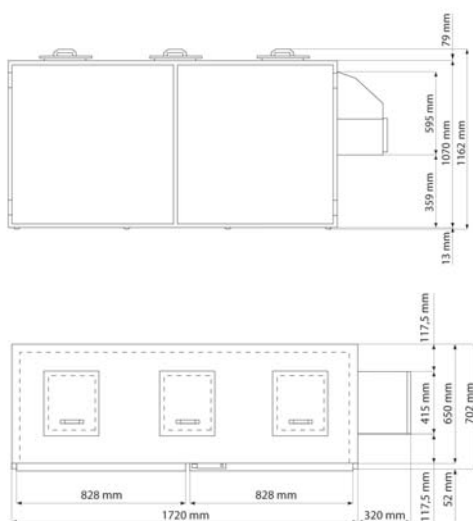

Waste disposal cooler 3 x 240 l

°C **+4.+20**

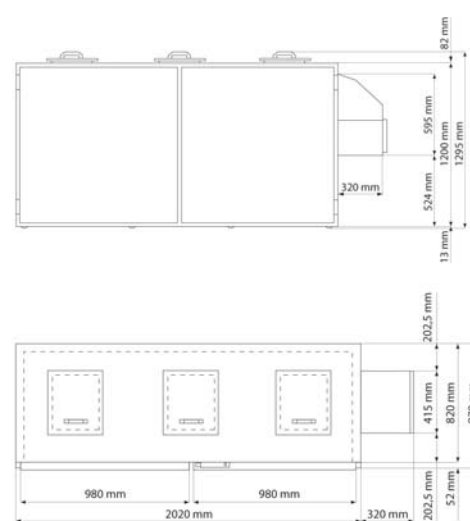



Ramp



External cooler



Lockable doors

Standard equipment

- Refrigerating unit ready for operation
- Thermostatically-controlled external cooler with digital thermostat with defrost control and temperature display
- Ramp for changing the waste bins
- Lockable doors

Optional accessories / Optional version

- Feed channel for the use of 120 l rubbish bins
- External cooler with or without winter regulation
- Waste disposal cooler with cut-out for the refrigeration unit on the left side panel
- Waste disposal cooler used for central cooling connection incl. expansion valve R 404 A incl. digital controller with sensor prewired
- Waste disposal cooler used for central cooling connection incl. expansion valve R 134 A incl. digital controller with sensor prewired



climate of innovation

Germany
Viessmann K hlsysteme GmbH
Tel. +49 9281 814-0
Fax +49 9281 814-269
kuehlsysteme@viessmann.de
www.viessmann.de/kuehlsysteme

Switzerland
Viessmann (Schweiz) AG
Telephone +41 56 418 67 11
Fax +41 56 401 13 91
info@viessmann.ch
www.viessmann.ch/kuehlsysteme

Austria
Viessmann Ges.m.b.H.
Telephone +43 72 42 623 81-100
Fax +43 72 42 623 81-440
info@viessmann.at
www.viessmann.at/kuehlsysteme

United Kingdom
Viessmann Cold Technology UK Ltd.
Telephone +44 121 7440 422
Fax +44 121 7440 433
sales@viessmann-coldtech.co.uk
www.viessmann-coldtech.co.uk

France
Viessmann Technique du Froid SAS
Telephone +33 3 87291700
Fax +33 3 87941655
france@viessmann-refrigeration.com
www.viessmann-refrigeration.com

Poland
Viessmann Group – Norpe Polska SP.z. o.o
Telephone +48 22 882 0020
Fax +48 22 882 00 19
norpe@norpe.pl
www.norpe.pl

Russia
Viessmann Group – Norpe Moscow
Norpe St. Petersburg
Telephone +7 499 277 1260
www.norpe.com.ru

United Arab Emirates
Viessmann Middle East FZE
Telephone +971 43724247
Fax +971 43724241
refrigeration@viessmann.ae
www.viessmann.ae/refrigeration

Your trade partner: